

HILLBILLY

BRAKE



BETTER THAN A STICK

6292 Old Troy Pike
Urbana, OH 43078

833-990-2725
Info@HillbillyBrake.com

INSTALLATION INSTRUCTIONS

Polaris Ranger 900 & 1000
Parking Brake
Model - HB-Ranger9-1

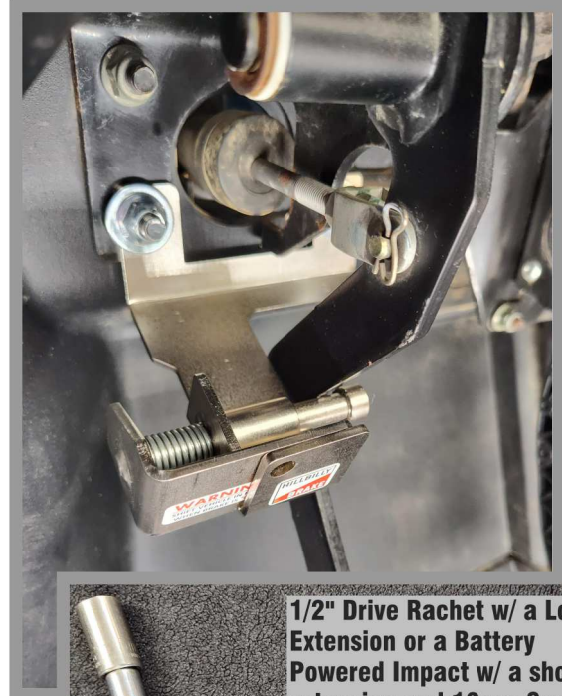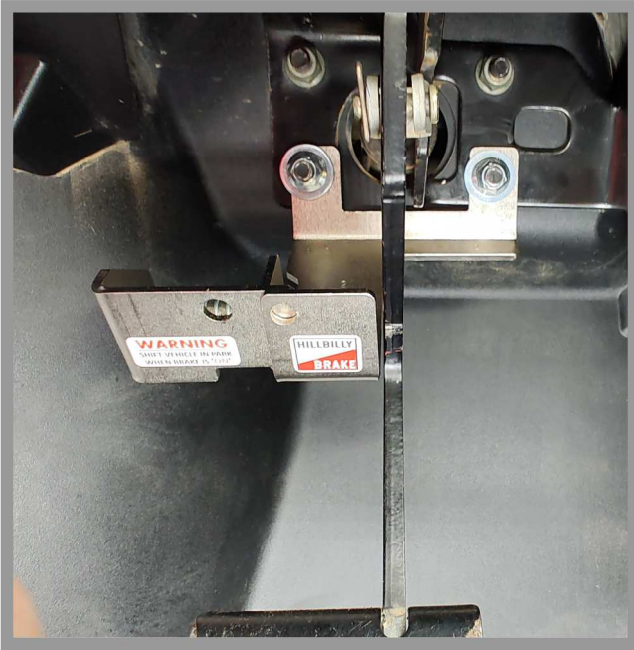


WARNING:


Always place the vehicle shift lever to 'PARK' when the Hillbilly Brake™ is 'ON'.


Read entire instructions and review illustrations prior to beginning.

Step #1:
Remove the (2) lower 13mm nuts from the left and right side of the brake pedal bracket studs.

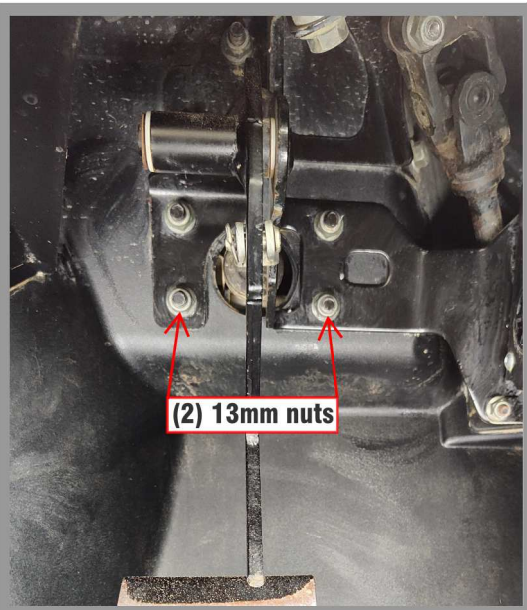

Step #2:
Install the Hillbilly Brake™ on the 2 lower studs and slide it towards the brake pedal leaving an 1/8" gap.

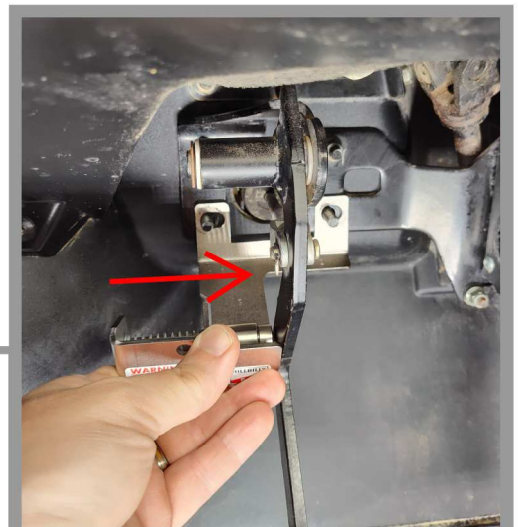


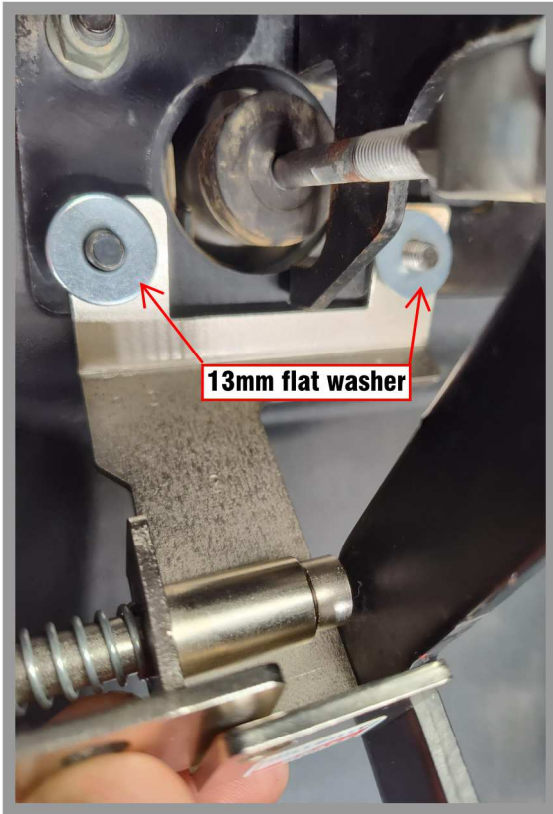

Step #3:
Install (1) 13mm flat washer on each stud.


13mm flat washer

Step #4:
Re-install the (2) 13mm nuts and tighten them while holding the Hillbilly Brake™ in position and to the right or towards the brake pedal. With the nuts tightened check that the brake pedal moves freely with a minimum 1/8" gap between the brake pedal and the Hillbilly Brake™.

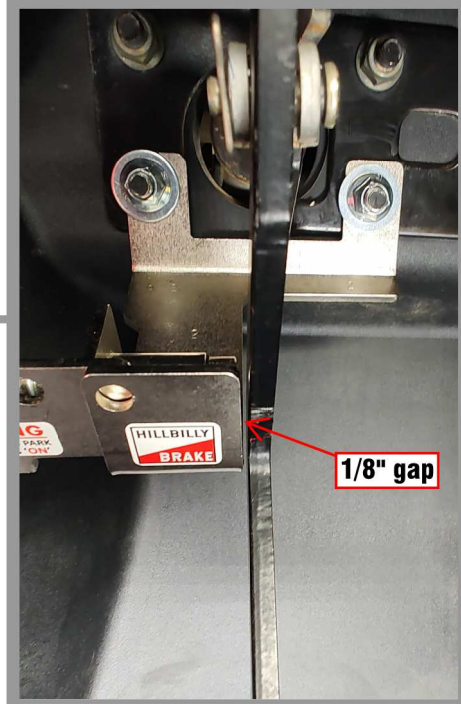

1/8" gap

Final Step:
Engage the Hillbilly Brake™ and check to make sure the slide pin and retainer bushing slide past the right side of the brake pedal arm. This completes your install. If you have any questions please go to our website and leave us a message or call our office.
@ 833-990-2725.

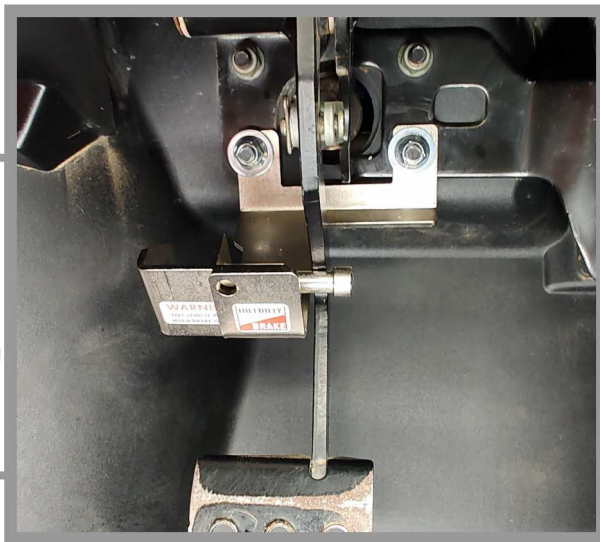

Read the Operating Instructions for proper use and maintenance.

Liability Statement

WARNING the vehicle transmission shift lever must ALWAYS be placed in 'PARK' when the Hillbilly Brake™ is 'ON'.

The Hillbilly Brake™ is designed as a secondary system to assist with parking on a hill and to help prevent damage to the vehicle transmission gears. Always use extra precautions when parking on slopes or inclines, never allow persons to stand in path of vehicle down the slope or incline. The Hillbilly Brake™ relies on the vehicle braking system to hold the vehicle on a slope or incline, the vehicle braking system must be in proper working condition to use the Hillbilly Brake™.


By purchasing and installing the Hillbilly Brake™ product, user agrees that should damage occur, Hillbilly Brake™, LLC will not be responsible for loss of time, use, labor fees, replacement parts, or freight charges. Hillbilly Brake™, LLC, nor any 3rd party, will not be responsible for any direct, indirect, incidental, special, or consequential damage that result from this product. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for this product.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation of law. The buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings, and instructions and agrees to hold Hillbilly Brake™, LLC harmless from any damage resulting from failure to adhere to such specifications, warnings, and/or instructions. The buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the buyer agrees to hold Hillbilly Brake™, LLC harmless from any violation thereof.

Hillbilly Brake™, LLC assumes no responsibility for damage to your UTV, or personal injury by using our product and services. Our hill brake is designed to help protect your UTV transmission from extreme conditions as much as possible. You are using our products and services at your own risk. Always practice safe driving.

Locking the Hillbilly Brake™ with the operator's own lock will secure or immobilize the UTV, but this is only a deterrent and Hillbilly Brake™, LLC issues no guarantee against theft or loss of property. Use precaution and additional means as necessary to prevent theft or loss of property.

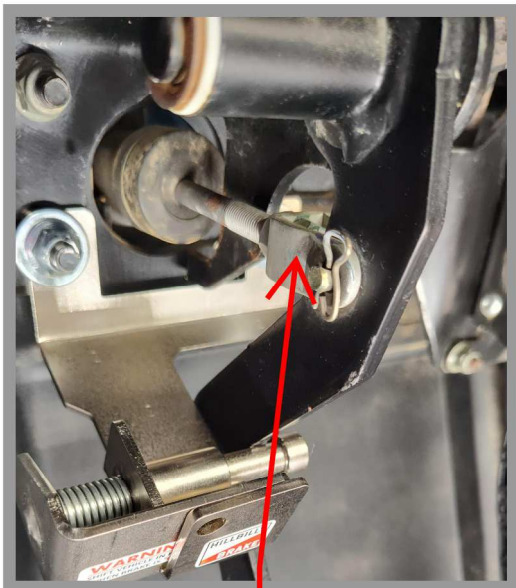

You can make small adjustments to the brake pedal position/pressure by making adjustments to the yoke at the back of the brake pedal arm.

HILLBILLY

BRAKE

BETTER THAN A STICK

6292 Old Troy Pike
Urbana, OH 43078

833-990-2725
Info@HillbillyBrake.com

OPERATING INSTRUCTIONS

Polaris Ranger 900 & 1000 Parking Brake Model - HB-Ranger9-1

OPERATING INSTRUCTIONS:

To Engage the Hillbilly Brake™

1. Press the vehicle brake pedal and hold down to stop the vehicle.
2. Place the vehicle shift lever to 'PARK'.
3. Push and HOLD the Hillbilly Brake™ action arm towards the passenger side of the vehicle with your foot or hand. The holes will be aligned when the brake is on.
4. Release the brake pedal while engaging the Hillbilly Brake™ and the brake pedal will be held in the engaged position.


To Disengage the Hillbilly Brake™

1. Press the brake pedal and the Hillbilly Brake™ will automatically disengage.

Recommended Maintenance:

After every interior cabin wash or cleaning, it is recommended that the user lubricate the slide pin/spring with 2-3 drops of 3 in 1 oil or a similar type lubricant.

Read entire instructions and review illustrations prior to using this product.

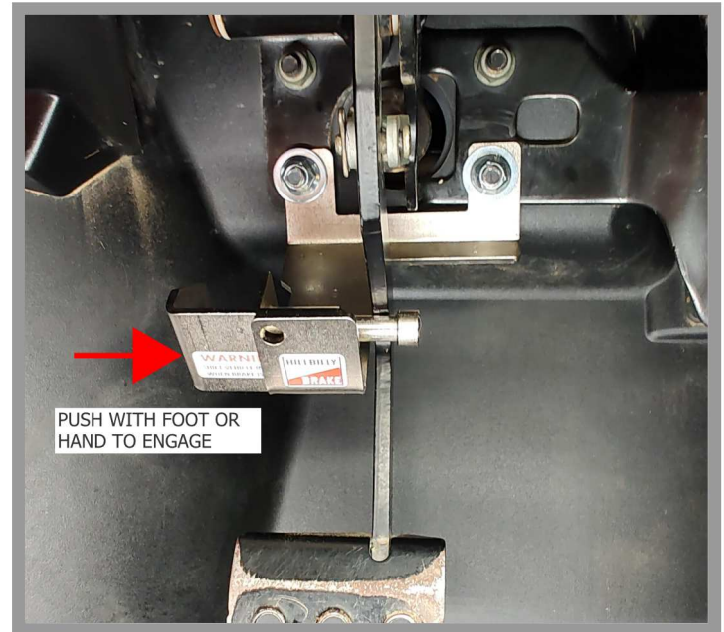

WARNING:

Always place the vehicle shift lever to 'PARK' when the Hillbilly Brake™ is 'ON'.



To Secure the Hillbilly Brake™:
Align the (2) holes in the front of the brake assembly and insert a pad lock with a 5/16" diameter shackle.

Liability Statement

WARNING the vehicle transmission shift lever must ALWAYS be placed in 'PARK' when the Hillbilly Brake™ is 'ON'.

The Hillbilly Brake™ is designed as a secondary system to assist with parking on a hill and to help prevent damage to the vehicle transmission gears. Always use extra precautions when parking on slopes or inclines, never allow persons to stand in path of vehicle down the slope or incline. The Hillbilly Brake™ relies on the vehicle braking system to hold the vehicle on a slope or incline, the vehicle braking system must be in proper working condition to use the Hillbilly Brake™.

By purchasing and installing the Hillbilly Brake™ product, user agrees that should damage occur, Hillbilly Brake™, LLC will not be responsible for loss of time, use, labor fees, replacement parts, or freight charges. Hillbilly Brake™, LLC, nor any 3rd party, will not be responsible for any direct, indirect, incidental, special, or consequential damage that result from this product. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for this product.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation of law. The buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings, and instructions and agrees to hold Hillbilly Brake™, LLC harmless from any damage resulting from failure to adhere to such specifications, warnings, and/or instructions. The buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the buyer agrees to hold Hillbilly Brake™, LLC harmless from any violation thereof.

Hillbilly Brake™, LLC assumes no responsibility for damage to your UTV, or personal injury by using our product and services. Our hill brake is designed to help protect your UTV transmission from extreme conditions as much as possible. You are using our products and services at your own risk. Always practice safe driving.

Locking the Hillbilly Brake™ with the operator's own lock will secure or immobilize the UTV, but this is only a deterrent and Hillbilly Brake™, LLC issues no guarantee against theft or loss of property. Use precaution and additional means as necessary to prevent theft or loss of property.